

## GD-CI-AC2616T

2 MP Mini Bullet IP-Camera 2.8mm ICR IR LED dWDR



- Support Dual Power PoE/DC12V
- 0 Lux: Integrated LED IR Illuminator viewable distance up to 30m
- H.264 & MJPEG compression modes
- Lens: f = 2.8 mm, 106° Horizontal Angle
- 2 Megapixel IP Camera with Full HD 1080P real time video
- 3 Axis Gimbal for wall and ceiling mount



### ESSENTIAL

- Product Line Essential: high quality, basic features and remarkably many functions for smaller applications

Item Code: GD-CI-AC2616T

EAN CODE: 4260573060177

## Specifications GD-CI-AC2616T

### Camera

Image Sensor:	1/2.8" progressive Scan CMOS
Video Resolution:	1920 x 1080
Sensitivity Colour:	0.01 Lux @ F1.2 (AGC ON)
Sensitivity B/W:	0 Lux LED IR on
Shutter Speed:	1/3 ~ 1/100,000 s (Automated Electronic Shutter)
Slow Shutter:	Support

### Lens

Lens Focal Length:	2.8 mm
Horizontal Viewing Angle:	106°
Iris F-Number:	F2.0
Lens Mount:	M12

### Illuminator

Max. IR Distance:	Up to 30 m
Wavelength:	850nm

### Video

Col/B&W:	On, Off, Auto, IR-cut filter removable (ICR)
Wide Dynamic Range:	72 db (Digital Wide Dynamic Range) Off, Low, Middle, High
Image Enhancement:	BLC, 3D DNR
Image settings:	Saturation, brightness, contrast and sharpness adjustable through client software or web browser
Day/Night Switch:	Support auto, scheduled

### Network

Functions:	One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, Ip-address filter
Video Compression:	Main stream: H.264 , H.264+ Sub stream: H.264, MJPEG
Region of Interest:	Support 1 fixed region
H.264 code profile:	Baseline Profile / Main Profile
Bit Rate:	32Kbps ~ 8Mbps
Network memory:	NAS(NFS, SMB/CIFS)
Network Protocol:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
Cyber Security:	3 levels of user management: admin, operator, user, AES Encryption for Password Protection, Complicated Password, HTTPS (SSL) Login Authentication, Basic and digest authentication for HTTP/HTTPS, Watermark, IP Adress Filter, WSSE and digest authentication for ONVIF, TLS 1.0, TLS 1.1, Brute Force Delay Protection, Signed Firmware, Secure Boot by software check

Item Code: GD-CI-AC2616T

EAN CODE: 4260573060177

**Network**

Frame Rate:	Main Stream 50Hz: 25fps @ (1920 × 1080, 1280 × 960, 1280 × 720) 60Hz: 30fps @ (1920 × 1080, 1280 × 960, 1280 × 720) Sub- Stream 50Hz: 25fps @ (704 × 576, 640 × 480, 352 × 288, 320 × 240) 60Hz: 30fps @ (704 × 480, 640 × 480, 352 × 240, 320 × 240)
-------------	--

**I/O Interface**

Network Interface:	1x 10, 100 Base T, TX PoE+ (RJ-45)
--------------------	------------------------------------

**Intelligent Functions**

Intrusion Detection:	Motion Detection
Event Source:	Video tampering, network disconnected, IP address conflicted

**Approvals**

Regulation:	CE, EAC, FCC, RoHS Compliant
Protection Rating:	IP67
Standard:	ONVIF (Profile S, Profile G), PSIA, CGI, ISAPI

**Environmental**

Operating Temperature:	-40 °C ~ 60 °C (-40 °F ~ 140 °F)
Humidity:	less than 95%, non condensing

**Electrical**

Supply Voltage:	12 VDC, PoE (IEEE 802.3af)
Power Consumption:	Max. 5 W

**Mechanical**

Mount:	Pan: 0° to 360°, tilt:-90° to 90°, rotation: 0° to 360°, 3-Axis Adjustment
Dimensions:	172 × 70 × 65 mm ( 6.77 × 2.75 × 2.56 inch)
Weight:	500 g (1.1 lb)


**Accessories:**

GD-BR-AJX05

**Dimensions:**

Item Code: GD-CI-AC2616T

EAN CODE: 4260573060177

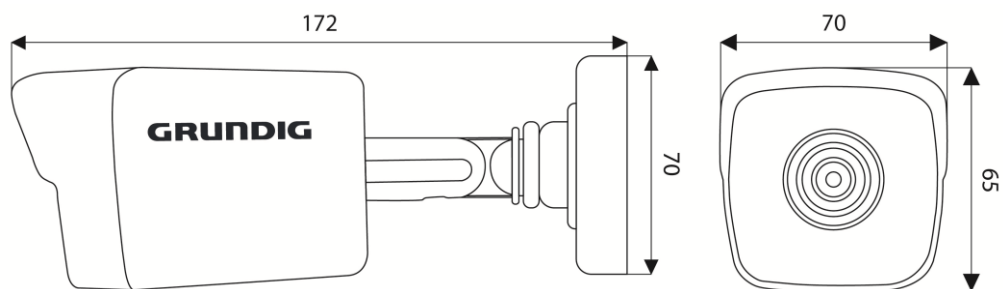

Item Code: GD-CI-AC2616T

EAN CODE: 4260573060177

® Abetechs GmbH (Grundig Security), Düsseldorf, Germany

[grundig-security.com](http://grundig-security.com)