



Type: Bullet - IP - 4G/5G - Camera

Item Code: GD-CI-CT8339TH

EAN CODE: 4260573065813

PREMIUM

The PREMIUM product line offers versatile solutions with unique and unparalleled features.

Highlights

H.265+



H.265pro+ utilizes the standard H.265/High Efficiency Video Coding (HEVC) format, but boasts advanced technologies that enable it to substantially reduce the necessary transmission bandwidth and storage capacity for maximum efficiency.

Deep Learning



Deep Learning is inspired by the complex structure of the human brain. This innovative method allows processing of information and performing corresponding actions based on analysis.

Object Classification



This technology employs a highly advanced deep learning algorithm that can discern whether the alarm was triggered by a human, a vehicle or some other object.

Features

- 8 Megapixel IP Camera with real time video streaming
- Deep Learning - Human and Vehicle Analysis: Self learning human and vehicle classification improves unwanted alarm filtering
- H.265/H.265+, H.264/H.264+ & MJPEG compression modes
- Excellent low-light performance
- Deep Learning - Recognition of vehicles: Supports vehicle model & Colour recognition and license plate recognition
- Mobile communication with 5G standard
- 3 Axis Gimbal for wall and ceiling mount

Specifications GD-CI-CT8339TH

Camera

Image Sensor:	1/1.8" progressive Scan CMOS
Resolution (MP):	8 MP
Video Resolution:	3840 × 2160
Sensitivity Colour:	0.0005 Lux @ F1.2 (AGC ON)
Sensitivity B/W:	0.0001 Lux @ F1.2 (AGC ON)
Shutter Speed:	1 ~ 1/100,000 s
Slow Shutter:	Support
White Balance:	Manual, AWB1, AWB2, Locked WB, Fluorescent lamp, Incandescent lamp, Warm light, Natural light

Lens

Lens Focal Length:	2.8 ~ 12 mm motorized, autofocus
Iris F-Number:	F1.38 ~ F2.53
Lens Drive Type:	P-Iris
Field of View:	104° ~ 41° (horizontal), 54° ~ 23° (vertical), 126.5° ~ 47° (diagonal)

Illuminator

Max. IR Distance:	Up to 60 m
Wavelength:	850 nm

Video

Col/B&W:	On, Off, Auto, IR-cut filter removable (ICR) with blue glass module to reduce ghost phenomenon
Wide Dynamic Range:	140 dB
Image Enhancement:	BLC, 3D DNR, Defog, EIS, HLC
Image Settings:	Rotate mode, Saturation, Brightness, Contrast, Sharpness and white balance adjustable by client software or web browser
Day/Night Switch:	Support auto, scheduled, day, night, triggered by alarm in
Privacy zones:	8 zones, rectangle, blackened or mosaic

Audio

Audio Compression:	G.711ulaw/G.711alaw/G.722.1/G.726/MP2L2/PCM/MP3/AAC
Environment Noise Filtering:	yes

General

DRI Range:	Detection: Wide 87 m Tele 216 m Observation: Wide 35 m Tele 86 m Recognition: Wide 17 m Tele 43 m Identification: Wide 9 m Tele 22 m The DORI (detect, observe, recognize, identify) distance gives the general idea of the camera ability to distinguish persons or objects within its field of view. It is calculated based on the camera sensor specification and the criteria given by EN 62676-4: 2015.
Accessories included:	Junction box

Frame Rate

Main Stream:	50 Hz: up to 50 fps (3840 × 2160, 3072 × 1728, 2688 × 1520, 1280 × 720) up to 100 fps (1920 × 1080) 60 Hz: up to 60 fps (3840 × 2160, 3072 × 1728, 2688 × 1520, 1280 × 720) up to 120 fps (1920 × 1080) * High frame rate is only supported under monitoring mode
--------------	---

Frame Rate

Sub- Stream:	50 Hz: 25 fps (1280 × 720, 704 × 576, 640 × 480) 60 Hz: 30 fps (1280 × 720, 704 × 480, 640 × 480)
3rd Stream:	50 Hz: 25 fps (1920 × 1080, 1280 × 720, 704 × 576, 640 × 480) 60 Hz: 30 fps (1920 × 1080, 1280 × 720, 704 × 480, 640 × 480)
4th Stream:	50 Hz: 25 fps (704 × 576, 640 × 480) 60 Hz: 30 fps (704 × 480, 640 × 480)
5th Stream:	50 Hz: 25 fps (704 × 576, 640 × 480) 60 Hz: 30 fps (704 × 480, 640 × 480)

Network

Users:	3 Levels: Administrator, Operator and User
Number of Clients:	Up to 32, 20 simultaneously
Functions:	One-key reset, anti-flicker, five streams, heartbeat, mirror, password protection, privacy mask, watermark, IP-address filter
Video Compression:	H.264, H.264+, H.265, H.265+, MJPEG
Region of Interest:	Support four fixed region for each stream, and dynamic face tracking
H.264 code profile:	Baseline Profile / Main Profile / High Profile
Bit Rate:	32Kbps ~ 16Mbps, adjustable
Scalable Video Coding (SVC):	supported
SD Memory:	Micro SD/SDHC/SDXC card slot with ANR (up to 1TB), NAS (Support NFS, SMB/CIFS)
Client software:	C-WERK Viewer, SCMS, IOS App, Android App (SCMS)
Web Browser:	Plug-in required live view: IE10/IE11 Non Plug-in live view: Chrome 57+, Mozilla Firefox 52+, EDGE 89+ Local Service: Chrome 57+, Firefox 52+, EDGE 89+
Network Protocol:	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, SNMP, SMTP, IGMP, 802.1X, QoS, IPv4/IPv6, UDP, PPPoE, Bonjour, SFTP, SRTP, SSL/TLS
Cyber Security:	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), Watermark, IP-address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.2, TLS 1.3, TPM 2.0, AES128/256

Mobile Communications

MC Standard:	5G: 5G NR/LTE-FDD/LTE-TDD
Frequency:	5G NR: n41/n77/n78/n79 LTE-FDD: B1/B3/B5/B8 LTE-TDD: B38/39/B40/B41
SIM Card Type:	Micro SIM

I/O Interface

Audio Input/Output:	1-ch audio input and 1-ch audio output
Alarm Input/Output:	2 inputs, 2 outputs (up to 24 VDC 1 A)
Network Interface:	1x 10, 100, 1000 Base T, TX (RJ-45)
Interfaces:	1x RS485, 1x Wiegand

Intelligent Functions

Deep Learning Analytics:	Line crossing detection, intrusion detection, human and vehicle object classification
Motion Detection:	Adjustable whether people or motorized vehicles or only movements should be detected. The detection area and sensitivity can also be adjusted.
Intrusion Detection:	Enter and loiter in a pre-defined virtual region, up to 4 pre-defined virtual regions supported
Line Crossing:	Cross a pre-defined virtual line, up to 4 pre-defined virtual lines supported
Face Recognition:	Detection of up to 120 faces simultaneously, 10 face libraries configurable with up to 30.000 faces each

Intelligent Functions

Heat Map:	Visualizes the number of people in the surveillance area over a period of time with a simple and user-friendly color scheme
Queue Length Detection:	Counts people in a predefined area and measures service time. The area, the maximum number of people in it and the maximum service time can be set
Crowd Density Detection:	Counts people in a predefined area. The area, the maximum number of people in it can be set
Tamper Protection:	Detection of scene change, defocus, sudden audio increase/decrease or audio loss.
Event Source:	Video tampering, network disconnected, IP address conflicted, HDD full, HDD error, illegal login, motion detection
Event Action:	Send E-mail, trigger alarm output, notify surveillance C-WERK, upload to FTP/NAS, trigger SD-card recording and/or image capture.

Approvals

Protection Rating:	IP67 (IEC 60529-2013), IK10 (IEC 62262:2002), NEMA 4X (NEMA 250-2018)
Regulation:	CE, FCC, RoHS Compliant
Standard:	ISAPI, SDK, ISUP, UCAP, ONVIF (Profile S, Profile G, Profile T, Profile M), SDK/API

Environmental

Operating Temperature:	-40 °C ~ 65 °C (-40 °F ~ 149 °F)
Humidity:	Less than 95%, non condensing

Electrical

Surge Protection:	TVS 4000V Lightning Protection, Surge Protection and Voltage Transient Protection
Supply Voltage:	12 VDC, 24 VAC
Power Consumption:	Max. 25 W

Mechanical

Dimensions:	Ø 140 × 378 mm (Ø 5.5 × 14.9 inch)
Weight:	2175 g (4.8 lb)

Packaging

Package Dimensions:	425 x 190 x 180 mm (16.7 x 7.5 x 7.1 inch)
Package Weight:	3300 g (7.3 lbs)
Packaging Unit:	6
Bulk Package Dimensions:	615 x 410 x 510 mm (24.2 x 16.1 x 20.1 inch)
Bulk Package Weight:	20500g (45.19 lbs)

Accessories

GD-CW-VIEWER



GD-CW-FINDER



GD-SW-SCMS



GD-HW-SD-128GB



GD-HW-SD-256GB




GD-BR-AMC01AC



GD-BR-AML03AC

Dimensions

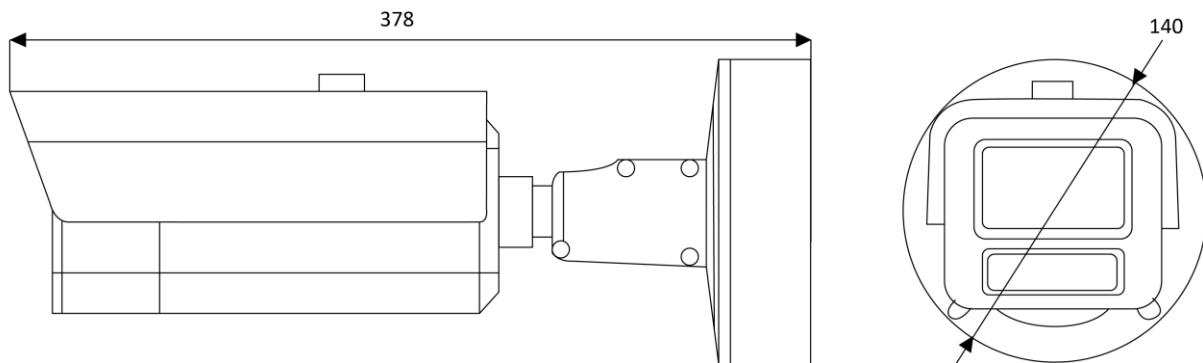

Guarantee

All cameras in the “SMART”, “PRO” and “PREMIUM” product lines have an extended warranty period of 5 years on electronic parts, mechanical wear and tear on moving parts is not included. Please note our general delivery terms and conditions.