# 2 MP Bullet HD-TVI Camera 2.8~12 mm

# GD-CT-AC2126T

Type: Bullet - HD-Analogue - Camera
Item Code: GD-CT-AC2126T
EAN CODE: 4260573060481

## ESSENTIAL

Our ESSENTIAL product line is designed to deliver high-quality performance, with basic features and impressive functions, making it perfect for smaller applications.

## Essential Line

Many small to medium-sized systems are capable of operating without any specific requirements. Simply storing video sequences is often sufficient in the event of an incident, allowing for the course of events to be determined through recorded footage. GRUNDIG Security provides a comprehensive range of standard applications to meet these needs, including cameras that capture high-resolution images regardless of lighting conditions and recorders capable of storing video sequences for weeks or months, although privacy concerns may prevent this practice. The "Essential" product line offers high image quality, making it ideal for meeting basic requirements.

## Features

- 2 Megapixel HD-TVI Camera with HD 1080P real time video
- 3 Axis Gimbal for wall and ceiling mount
- Smart IR Control
- Varifocal Lens: f = 2.8 - 12 mm
- 0 Lux: Integrated LED IR Illuminator viewable distance up to 40m
- Power Input DC12V

## Specifications GD-CT-AC2126T

| | |
|---|---|
| **Camera** | |
| Image Sensor: | 2 Megapixel progressive scan CMOS |
| Pixels - Effective: | 1920 (H) x 1080 (V) |
| Sensitivity Colour: | 0.01 Lux @ F1.2 (AGC ON) |
| Sensitivity B/W: | 0 Lux LED IR on |
| Shutter Speed: | 1/25 (1/30) ~ 1/50,000 s |
| White Balance: | Auto, Manual |
| **Lens** | |
| Lens Focal Length: | 2.8 ~ 12 mm |
| Iris F-Number: | F1.4 ~ F3.5 |
| Lens Mount: | Ø14 |
| Field of View: | 102.3° (Wide) ~ 32° (Tele) |
| **Illuminator** | |
| Max. IR Distance: | Up to 40 m |
| Wavelength: | 850 nm |
| **Video** | |
| Video Standard: | PAL, NTSC |
| Col/B&W: | Auto , Color , B&W, IR-cut filter removable (ICR) |
| Wide Dynamic Range: | Digital WDR |
| Image Enhancement: | BLC, 2D DNR, Anti-Flicker, Mirror, AGC |
| S/N Ratio: | >62 dB |
| Frame Rate (Max@Resolution): | PAL: 1080p@25fps<br>NTSC: 1080p@30fps |
| **General** | |
| OSD (On Screen Display): | English |
| Coaxial control: | Coaxitron®, CCVC |
| **I/O Interface** | |
| Video Outputs: | 4 in 1 Switch between TVI, AHD, CVI and CVBS |
| **Approvals** | |
| Protection Rating: | IP66 (IEC 60529-2013) |
| Regulation: | CE, EAC, FCC, RoHS Compliant |
| **Environmental** | |
| Operating Temperature: | -40 °C ~ 60 °C (-40 °F ~ 140 °F) |
| Humidity: | Less than 95%, non condensing |
| **Electrical** | |
| Supply Voltage: | 12 VDC ±10% |
| Power Consumption: | Max. 4 W |
| **Mechanical** | |
| Mount: | Pan: 0° to 360°, tilt: 0° to 90°, rotation: 0° to 360°, 3-Axis Adjustment |
| Dimensions: | Ø 105 × 274 mm (Ø 4.1 × 10.79 inch) |
| Weight: | 900 g (1.98 lb) |

## Accessories

GD-AC-VB02

GD-BR-AMC03

GD-BR-AJX04

GD-BR-AML01
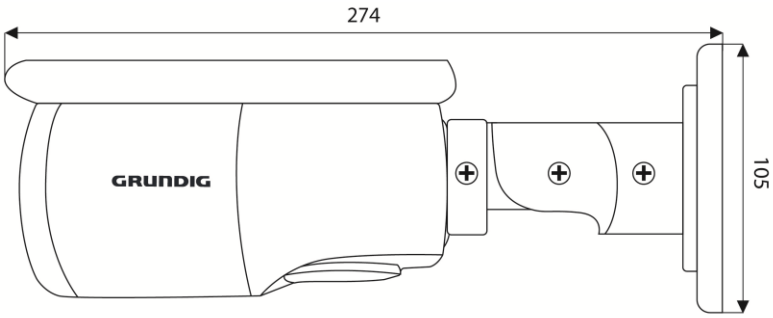
## Dimensions