

59.9 cm (23.6") LCD/TFT Monitor

GD-ML-DP2430HD

**GRUNDIG**



Type: Full HD - LCD/TFT - Monitor

Item Code: GD-ML-DP2430HD

EAN CODE: 4260573064366

**PROFESSIONAL**

The PROFESSIONAL product line comprehensively covers modern video systems and offers versatile solutions for various areas of application.

## Highlights

### Continuous operation



This Grundig Security device is capable of operating 24/7 continuously on any day.

## Features

- Designed for professional 24/7 usage
- LED Backpanel illumination
- 1 HDMI, 1 VGA Input
- Displays a full, flat 23.6" (59.9 cm) diagonal image
- Built-in Speaker

## Specifications GD-ML-DP2430HD

### Display

|                 |   |
|-----------------|---|
| LCD Panel size: | 59.9 cm (23.6") Diagonal AM-TFT LED Backlight |
| Pixels - Total: | 1920 (H) x 1080 (V), 4K compatible            |
| Pixel Pitch:    | 0.248 mm (H) x 0.248 mm (V)                   |
| Aspect Ratio:   | 16 : 9  |
| Viewing Angle:  | 170° (H) ~ 160° (V)                           |

### Video

|                    |                         |
|--------------------|-------------------------|
| Video Inputs:      | 1x HDMI, 1x VGA, 1x USB |
| Video Standard:    | PAL, NTSC               |
| Brightness:        | 300 cd, m <sup>2</sup>  |
| Contrast Ratio:    | 1000:1                  |
| Number of Colours: | 16.7 million            |
| Response Time:     | 5 ms                    |

### General

|                          |                              |
|--------------------------|------------------------------|
| Speakers:                | 2 x 2 W                      |
| OSD (On Screen Display): | Yes, multi language          |
| Accessories included:    | Power Adapter and HDMI cable |

### I/O Interface

|               |                           |
|---------------|---------------------------|
| Audio Inputs: | 1-ch, RCA (2.0 Vp-p, 1kΩ) |
|---------------|---------------------------|

### Approvals

|                |                              |
|----------------|------------------------------|
| Regulation:    | CE, EAC, FCC, RoHS Compliant |
| MTBF at 25° C: | > 50,000 hours               |

### Environmental

|                        |                               |
|------------------------|-------------------------------|
| Operating Temperature: | 0 °C ~ +45 °C                 |
| Humidity:              | Less than 90%, non condensing |

### Electrical

|                    |   |
|--------------------|---|
| Supply Voltage:    | 12 VDC, Power Adapter 100 ~ 240 VAC 50, 60Hz included |
| Power Consumption: | Max. 24 W   |

### Mechanical

|             |  |
|-------------|--|
| Material:   | Robust Plastic                             |
| Vesa Mount: | 100 x 100 mm                               |
| Dimensions: | 545 x 320 x 33 mm (21.5 x 12.6 x 1.3 inch) |
| Weight:     | 2700 g (5.95lb)                            |

### Packaging


|                          |  |
|--------------------------|--|
| Package Dimensions:      | 600 x 110 x 410 mm (23.6 x 4.3 x 16.1 inch)    |
| Package Weight:          | 3700 g (8.2 lbs)                               |
| Packaging Unit:          | 5  |
| Bulk Package Dimensions: | 620 x 590 x 430 mm (24.4 x 23.22 x 16.92 inch) |
| Bulk Package Weight:     | 20500g (45.19 lbs)                             |

## Dimensions

59.9 cm (23.6") LCD/TFT Monitor

GD-ML-DP2430HD

**GRUNDIG**

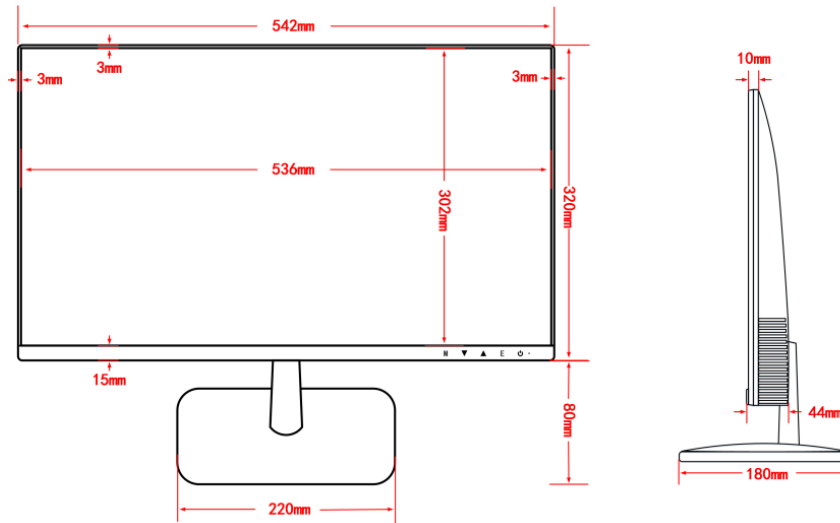

## Guarantee

All cameras in the "SMART", "PRO" and "PREMIUM" product lines have an extended warranty period of 5 years on electronic parts, mechanical wear and tear on moving parts is not included. Please note our general delivery terms and conditions.